



3-phase - 63 A direct

Function

The **COUNTIS E2x** is an electrical energy meter designed for three-phase networks. It is used for direct connections up to 63 A.

Applications


The **COUNTIS E20** is a totalising meter allowing direct reading of the power consumed, using a pulse output. A partial meter with reset allows the energy to be metered over a specific period.

The **COUNTIS E21** also offers the option of taking two different invoice tariffs into account. In this case, two partial meters are available.

Conformity to standards

- IEC 62053-21 class 1
- IEC 61557-12

Front panel

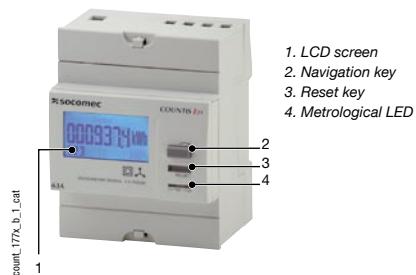

Electrical Characteristics


Current measurement

| | |
|------------------------------------|-----------------------|
| Type | 3-phase - 63 A direct |
| Input consumption | 0.8 VA max. per phase |
| Overload | 30 x I_{max} |
| Sustained overload | 63 A |
| Minimum measured current | 40 mA |
| | |
| Voltage measurement | |
| Range of measurement | 230 V +/- 20% |
| Consumption on inrush (VA) | 2 VA max. |
| Sustained overload | 280 V |
| | |
| Energy accuracy | |
| Active (according to IEC 62053-21) | Class 1 |

Input supply



| | |
|--------------------------|----------------------|
| Self-supply | Yes |
| Frequency | 50/60 Hz |
| | |
| Output (pulsed) | |
| Number | 1 |
| Phototransistor type | IEC 62053-31 Class A |
| Fixed weight of impulses | 100 Wh |
| Impulse duration | 100 ms |
| | |
| Operating conditions | |
| Operating temperature | -10 to 55°C |
| Storage temperature | -20 to 70°C |
| Relative humidity | 85 % |

Case

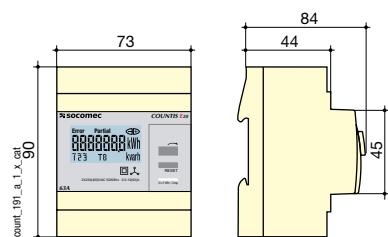

| | |
|-----------------------------------|---------------------------|
| Type | Modular |
| Number of modules | 4 |
| Dimensions W x H x D | 73 x 90 x 84 mm |
| Case protection rating | IP20 |
| Front protection rating | IP50 |
| Display type | Backlit LCD display |
| Rigid cable connection section | 1.5 to 16 mm ² |
| Flexible cable connection section | 1 to 16 mm ² |
| Weight | 245g |

Terminals and connections

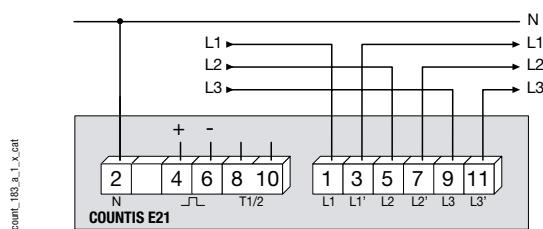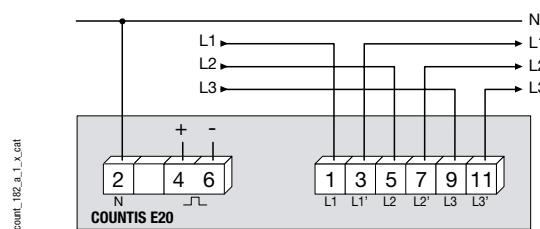

References

| Type | COUNTIS E20 Reference | COUNTIS E21 Reference |
|-------------------------------------|-----------------------|-----------------------|
| 63 A direct - 3-phase | 4850 3003 | |
| 63 A direct - 3-phase - Dual tariff | | 4850 3004 |